


Energy Storage System PCS : **PLABEX-H500K**

PLABEX-Series, Made it for
Energy Storage System(ESS)



PLABEX-H500K

- 국내 최소사이즈
- 단위용량 500kW PEBB
- 20년 이상의 수명설계에 따른 높은 신뢰성
- Efficiency 98% (최신 IGBT 적용)
- 낮은 THD (최신 제어기술 적용)
- FRT / 무효전력제어
- Modbus TCP/RTU, CAN 등 다양한 인터페이스
- 간결하고 명확한 7인치 화면의 HMI

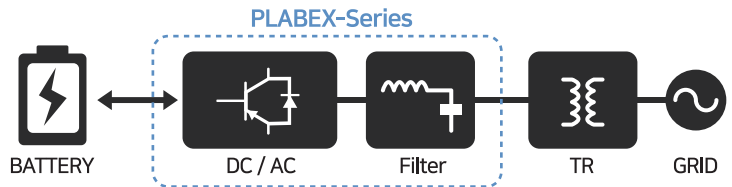

Model	PLABEX-H500K
Input (DC)	
Norminal. Input power [kW]	525
Max. Input voltage [Vdc]	1100
Max. Input current [A _{dc}]	700
DC Voltage range [Vdc]	750 ~ 1050
Output (AC)	
Norminal [kW]	500
Nominal output current [A _{ac}]	656
Output voltage [Vac, ±10%]	440
Frequency [Hz]	60
Current Harmonic [%]	Total<5 / Each<3
Power Factor	≥0.99
Grid Structure	IT, TN, TT
General Data	
Cooling principle	Forced Air Cooling
Relative humidity [%]	<95
Altitude above sea level [m]	<2000
Grand fault monitoring	Yes
IP level	≥20
Communication	Ethernet(TCP/IP), CAN, RS-232/485
Protection	UV, UV, OT, OC, SC, etc. DC-Switch, DC fuse, AC MCCB, GFD(option) etc.
Standard	SGSF-04-2012-07 / EMC CISPR11 : 2011, EN61000-4-2, 4, 6, 11 / IEE1547
Max. efficiency [%]	≥98.0
Dimensions (W/D/H) [mm]	1800 * 900 * 2040
Weight [kg]	about 1200